



# MFR 15

## Multi Function Relay Protection & Control

### APPLICATIONS

The MFR 1 Series is a family of industrial grade protective relays that offer multiple protective features in a single package.

Using a digital processor to measure true RMS values enables the control to have a high measuring accuracy, regardless of harmonics, transients or disturbing pulses.

The MFR 15 model includes a synchronizer and a load (kW) and power factor (cosphi) controller via discrete outputs to combine protection and control into one unit. Different packages offer additional functionality.

The MFR 15/SY is for single unit applications while the MFR 15/SYN has kW load sharing capability for multiple unit applications.

The compact size and multiple functions of the MFR 15 help to simplify switchgear design. The digital display offers a user-friendly interface to setup the unit as well as monitor the operation and display any alarms.

### Features (all)

- True RMS voltage (generator/busbar)
- True RMS current (generator)
- Configurable trip/control set points
- Configurable delays for each alarm
- 3 configurable relays
- 3 dedicated control relay outputs
- Two-line LC display

### DESCRIPTION

#### Protection (all) **ANSI #**

- Over-/undervoltage (59/27)
- Over-/underfrequency (81O/U)
- Voltage asymmetry (47)
- Overload (32)
- Reverse power (32R)
- Reduced power (32F)
- Unbalanced load (46)
- Loss of excitation (40Q)
- Independent time-overcurrent (50/51)

#### Package SY

- Synchronizer for 1 CB
  - Isolated operation
  - Mains parallel operation
- Speed/frequency/real power
- Voltage/power factor (cosphi)
- Remote real power set-point (0/4 to 20 mA)
- 3 configurable analog outputs (20 mA)
- Pulse output for kWh

#### Package SYN

- Synchronizer for 1 CB
  - Isolated operation
  - Mains parallel operation
- Speed/frequency/real power
- Voltage/power factor (cosphi)
- Remote real power set-point (0/4 to 20 mA)
- 3 configurable analog outputs (20 mA)
- Pulse output for kWh
- Load sharing via 0 to 4 Vdc analog line

#### Package SYN-I

- Synchronizer for 1 CB
  - Isolated operation
  - Mains parallel operation
- Speed/frequency/real power
- Voltage/power factor (cosphi)
- Remote real power set-point (0/4 to 20 mA)
- Load sharing via 0 to 4 Vdc analog line
- Interface RS-485/Modbus RTU Slave


- Complete generator protection and controller in one unit
- True RMS sensing
- Synchronization for one breaker
- Load sharing
- Discrete inputs for remote control
- Programmable relay outputs
- PC and front panel configurable
- Microprocessor technology for accurate, repeatable and reliable operation
- Programmable threshold set-points with individual time delays
- CE marked
- UL/cUL Listed
- GL Approval

# SPECIFICATIONS


Accuracy .....	Class 1	
Power supply .....	24 Vdc (18 to 30 Vdc)	
Intrinsic consumption .....	max. 12 W	
Ambient temperature .....	-20 to 70 °C	
Ambient humidity .....	95 %, non-condensing	
<b>Voltage</b> .....	Rated value $\sphericalangle/\Delta$ :	[1] 66/115 Vac or [4] 230/400 Vac
	Maximum value ( $V_{max}$ ):	[1] 150 Vac or [4] 300 Vac
	Rated voltage $V_{ph-ground}$ :	[1] 150 Vac or [4] 300 Vac
	Rated surge voltage:	[1] 2.5 kV or [4] 4.0 kV
Linear measuring range up to .....	$1.3 \times V_{rated}$	
Measuring frequency .....	50/60 Hz (40 to 70 Hz)	
Input resistance .....	[1] 0.21 M $\Omega$ , [4] 0.7 M $\Omega$	
Max. power consumption per path .....	< 0.15 W	
<b>Current</b> ( $I_{rated}$ ) .....	[1] ..1 A or [5] ..15 A	
Linear measuring range up to .....	$3.0 \times I_{rated}$	
Load .....	< 0.15 VA	
Rated short-time cur. (1 s) .....	[1] 100.0 $\times I_{rated}$ , [5] 20.0 $\times I_{rated}$	
<b>Discrete inputs</b> .....	isolated	
Input range .....	18 to 250 Vac/dc	
Input resistance .....	approx. 68 k $\Omega$	
<b>Pulse outputs</b> .....	transistor output	
Rated gate voltage .....	24 Vdc	
Maximum gate voltage .....	32 Vdc	
Minimum gate current .....	10 mAdc	
Maximum gate current .....	30 mAdc (0.5 Vdc)	

<b>Relay outputs</b> .....	isolated
Contact material .....	AgCdO
Load (GP) .....	24 Vdc@2 Adc, 250 Vac@2 Aac
Pilot duty (PD) .....	24 Vdc@1 Adc
<b>Analog output</b> .....	isolated
Type .....	0/4 to 20 mA, freely scaleable
Resolution .....	8/12 Bit (depending on model)
Max. load 0/4 to 20 mA .....	500 $\Omega$
Insulating voltage .....	500 Vdc
<b>Housing</b> .....	Type APRANORM DIN 43 700
Dimensions .....	96 $\times$ 72 $\times$ 130 mm
Front cutout .....	91[+0.8] $\times$ 67[+0.7] mm
Connection .....	screw/plug terminals depending on connector 1.5 mm <sup>2</sup> , 2.5 mm <sup>2</sup> or 4mm <sup>2</sup>
Front .....	insulating surface
Protection system .....	IP 21
Weight .....	depending on version, approx. 800 g
<b>Disturbance test</b> (CE) .....	tested according to applicable EN guidelines
<b>Listings</b> .....	UL/cUL listed for ordinary locations
<b>Approvals</b> .....	GL (Germanischer Lloyd)

# DIMENSIONS

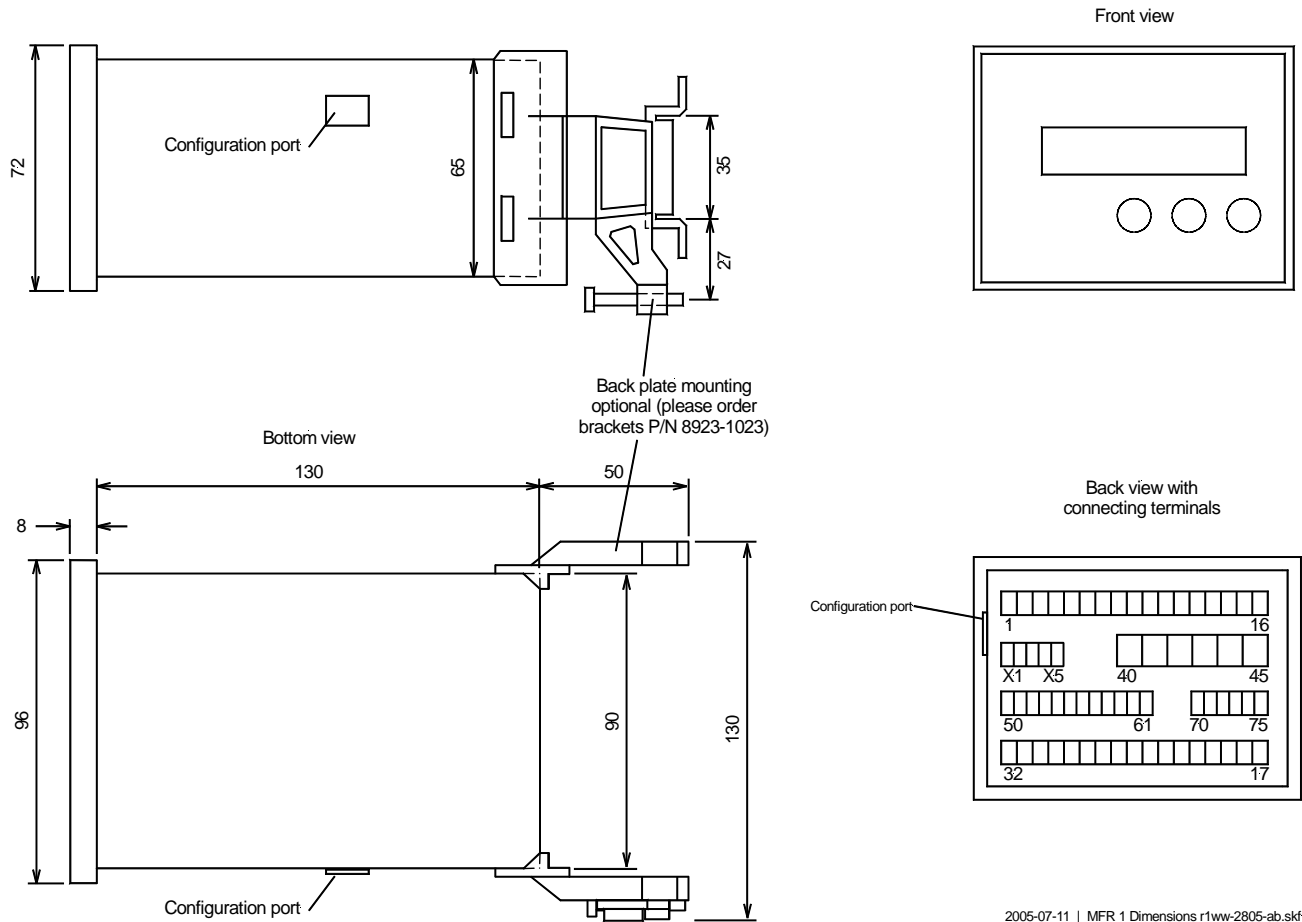

# WIRING DIAGRAM

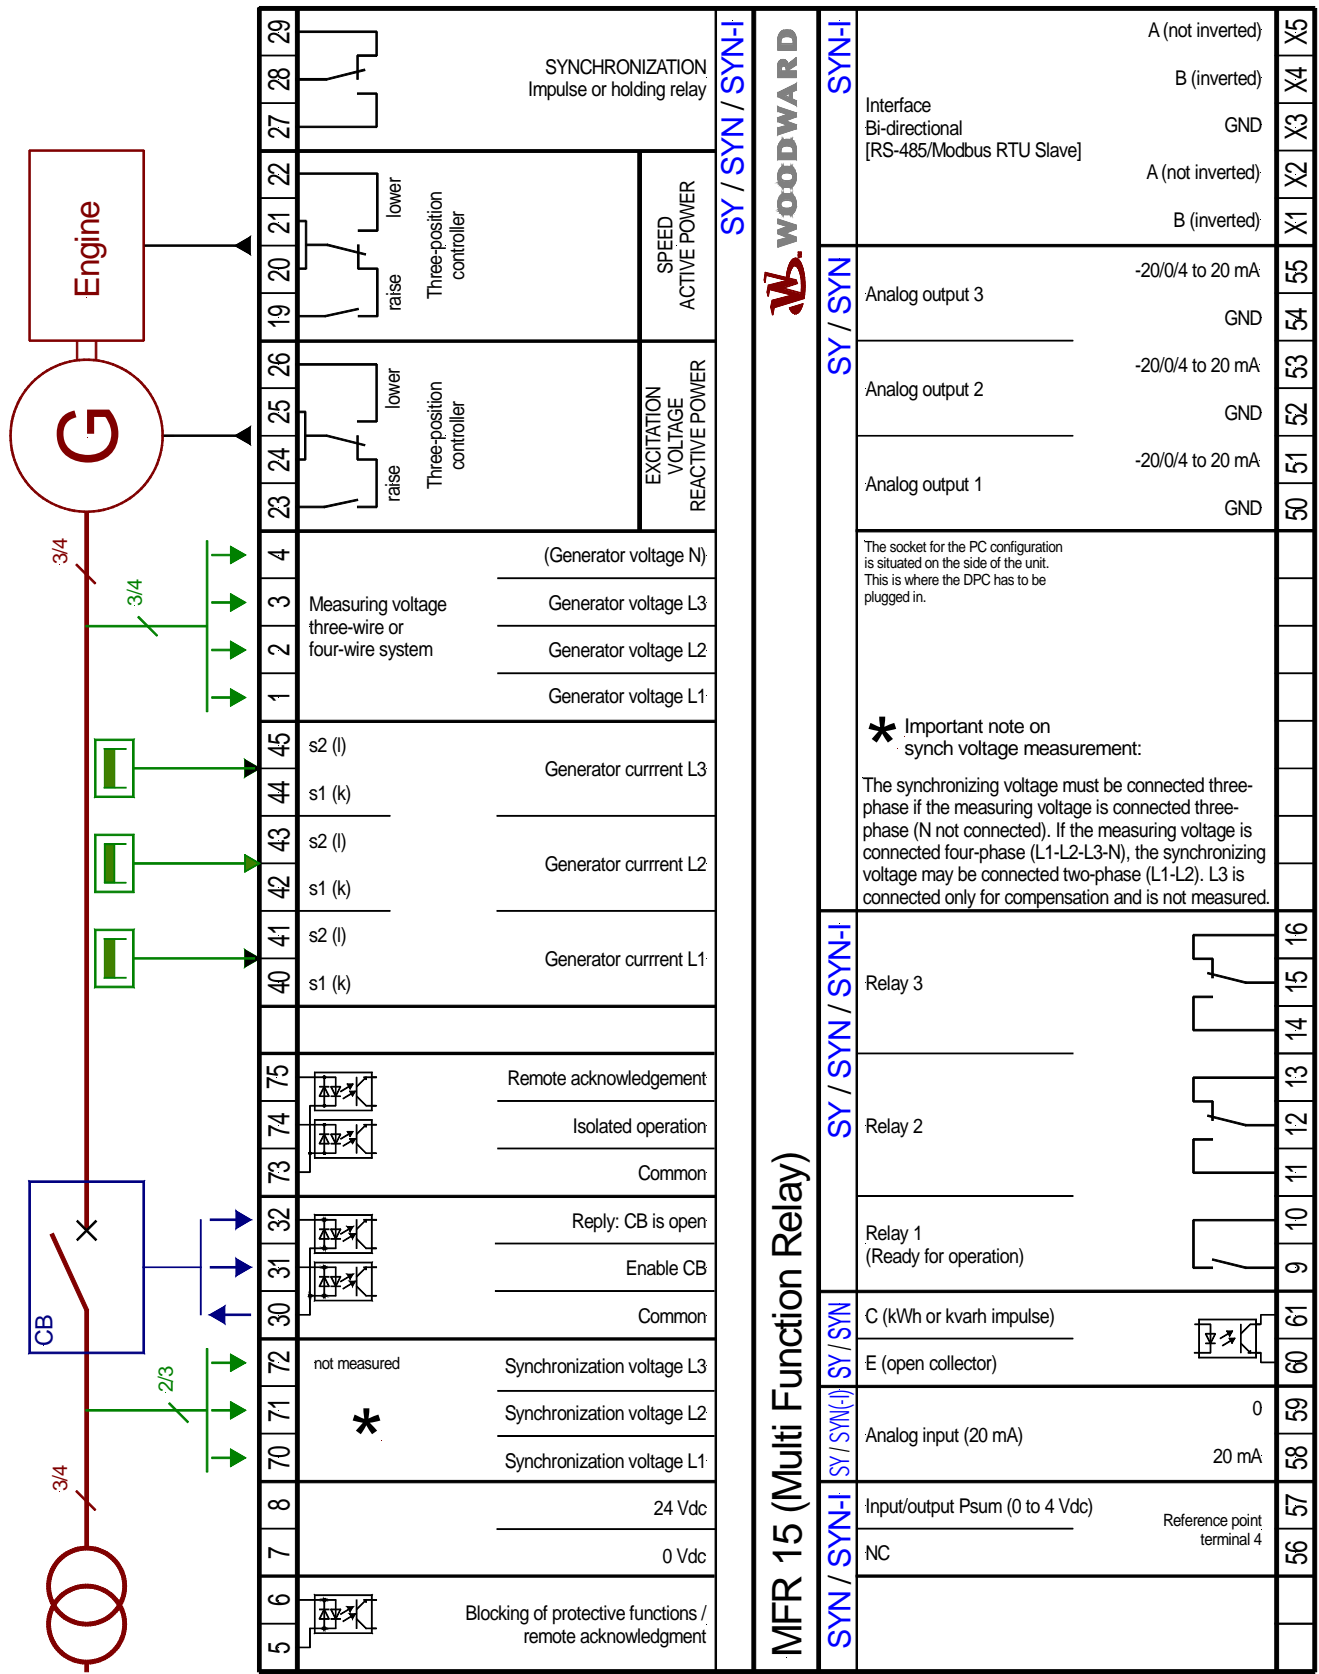

Subject to technical modifications.

**International**  
 Woodward  
 PO Box 1519  
 Fort Collins CO, USA  
 80522-1519  
 1000 East Drake Road  
 Fort Collins CO 80525  
 Ph: +1 (970) 482-5811  
 Fax: +1 (970) 498-3058

**Europe**  
 Woodward Governor Company  
 Leonhard-Reglerbau GmbH  
 Handwerkstrasse 29  
 70565 Stuttgart, Germany  
 Ph: +49 (0) 711 789 54-0  
 Fax: +49 (0) 711 789 54-100

**Distributors & Service**  
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

**Corporate Headquarters**  
 Rockford IL, USA  
 Ph: +1 (815) 877-7441

[www.woodward.com/power](http://www.woodward.com/power)

For more information contact:

Subject to technical modifications.


This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to [stgt-doc@woodward.com](mailto:stgt-doc@woodward.com)

© Woodward Governor Company

All Rights Reserved

03247D - 06/3/S

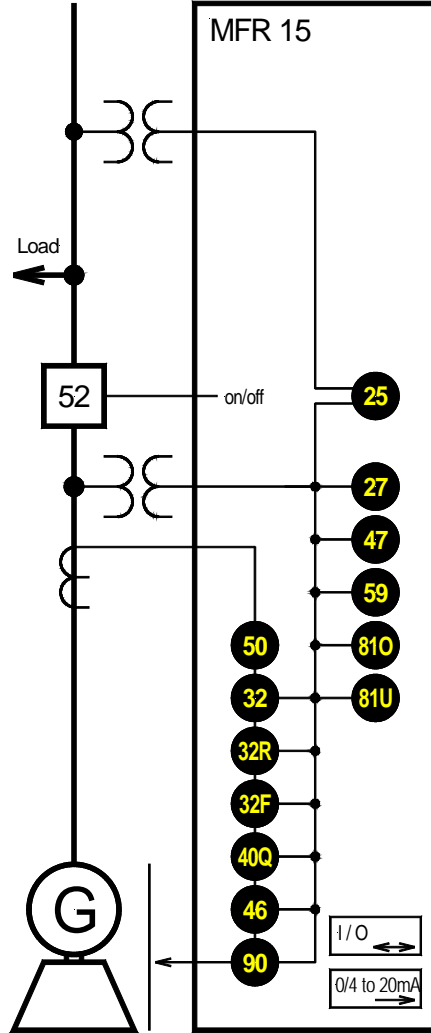

	MFR 15			
	ANSI	SY	SYN	SYN-I
<b>Control</b>				
Breaker control logic		1	1	1
Synchronization		✓	✓	✓
Isolated single-unit operation		✓	✓	✓
Mains parallel operation		✓	✓	✓
<b>Accessories</b>				
kWh counter		✓	✓	✓
Configuration via PC #1		✓	✓	✓
<b>Protection</b>				
Overvoltage	59	✓	✓	✓
Undervoltage	27	✓	✓	✓
Overfrequency	81O	✓	✓	✓
Underfrequency	81U	✓	✓	✓
Voltage asymmetry	47	✓	✓	✓
Overload	32	✓	✓	✓
Reverse power	32R	✓	✓	✓
Reduced power	32F/37	✓	✓	✓
Unbalanced load	46	✓	✓	✓
Loss of excitation	40Q	✓	✓	✓
Independent time-overcurrent	50/51*	✓	✓	✓
<b>Controller</b>				
Discrete raise/lower: n/f & P (speed/frequency/real power)		✓	✓	✓
Discrete raise/lower: V & Q (voltage/power factor cosphi)		✓	✓	✓
Remote real power set-point (0 to 20 mA)		✓	✓	✓
Load sharing (0 to 4 Vdc)			✓	✓
<b>I/Os</b>				
Analog output -20/0/4 to 20 mA (configurable, scaleable)		3	3	
Pulse output for kWh		✓	✓	
Relay outputs (configurable)	74	3	3	3
RS-485/Modbus RTU Slave				✓
<b>Listings/Approvals</b>				
CE marked		✓	✓	✓
UL/cUL listed		✓	✓	✓
GL (Marine)		✓	✓	✓
<b>Part numbers P/N</b>				
Measuring inputs 120 Vac, ..5 A	5448-899	5448-887	8440-1016	
Measuring inputs 400 Vac, ..5 A	8440-1592	8440-1257		
Measuring inputs 400 Vac, ..1 A		8440-1722		

\* not according to ANSI guidelines (three-step protection instead of inverse time characteristic)  
 #1 Cable incl. software necessary (DPC, Product Number P/N 5417-557)